# **SIEMENS**

Data sheet 3RV2031-4RA10



Circuit breaker size S2 for motor protection, CLASS 10 A-release 70...80 A N-release 1040 A screw terminal Standard switching capacity





product brand name	SIRIUS	
product designation	Circuit breaker	
design of the product	For motor protection	
product type designation	3RV2	
General technical data		
size of the circuit-breaker	S2	
size of contactor can be combined company-specific	S2	
product extension auxiliary switch	Yes	
power loss [W] for rated value of the current		
<ul> <li>at AC in hot operating state</li> </ul>	29.5 W	
• at AC in hot operating state per pole	9.8 W	
insulation voltage with degree of pollution 3 at AC rated value	690 V	
surge voltage resistance rated value	6 kV	
shock resistance according to IEC 60068-2-27	25g / 11 ms Sinus	
mechanical service life (operating cycles)		
<ul> <li>of the main contacts typical</li> </ul>	20 000	
of auxiliary contacts typical	20 000	
electrical endurance (operating cycles) typical	20 000	
reference code according to IEC 81346-2	Q	
Substance Prohibitance (Date)	04/10/2015	
SVHC substance name	Lead - 7439-92-1 Lead titanium zirconium oxide - 12626-81-2	
Weight	1.18 kg	
Ambient conditions		
installation altitude at height above sea level maximum	2 000 m	
ambient temperature		
<ul> <li>during operation</li> </ul>	-20 +60 °C	
during storage	-50 +80 °C	
during transport	-50 +80 °C	
relative humidity during operation	10 95 %	
Environmental footprint		
global warming potential [CO2 eq] total	239.877 kg	
global warming potential [CO2 eq] during manufacturing	12.8 kg	
global warming potential [CO2 eq] during sales	0.477 kg	
global warming potential [CO2 eq] during operation	230 kg	
global warming potential [CO2 eq] after end of life	-3.4 kg	
Siemens Eco Profile (SEP)	Siemens EcoTech	

Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-	70 80 A
dependent overload release	
operating voltage	
rated value	20 690 V
at AC-3 rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	80 A
operational current	
at AC-3 at 400 V rated value	80 A
operating power	
• at AC-3	
— at 230 V rated value	22 kW
— at 400 V rated value	37 kW
— at 500 V rated value	55 kW
— at 690 V rated value	75 kW
operating frequency	45.4/b
at AC-3 maximum  Protective and manifesting functions	15 1/h
Protective and monitoring functions	
product function	No
ground fault detection     phase failure detection	No Von
phase failure detection  trip class	Yes CLASS 10
trip class	thermal
design of the overload release	ulermai
maximum short-circuit current breaking capacity (Icu)  • at AC at 240 V rated value	65 kA
at AC at 240 V rated value     at AC at 400 V rated value	65 kA
at AC at 500 V rated value     at AC at 500 V rated value	8 kA
at AC at 690 V rated value     at AC at 690 V rated value	4 kA
operating short-circuit current breaking capacity (Ics) at AC	7 1/1
at 240 V rated value	65 kA
at 400 V rated value	30 kA
at 500 V rated value	5 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip unit	1 040 A
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	77 A
at 600 V rated value	77 A
yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	7.5 hp
— at 230 V rated value	15 hp
• for 3-phase AC motor	
— at 200/208 V rated value	25 hp
— at 220/230 V rated value	30 hp
— at 460/480 V rated value	60 hp
— at 575/600 V rated value	75 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 240 V	none required
• at 400 V	160
• at 500 V	125
• at 690 V	100
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715

height	140 mm
width	55 mm
depth	149 mm
required spacing	
with side-by-side mounting at the side	0 mm
• for grounded parts at 400 V	
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
• for live parts at 400 V	
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
• for grounded parts at 500 V	
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
• for live parts at 500 V	
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
• for grounded parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
• for live parts at 690 V	· • · · · · · · · · · · · · · · · · · ·
— downwards	50 mm
— upwards	50 mm
— at the side	10 mm
Connections/ Terminals	
type of electrical connection	
type of clock four comments.	
for main current circuit	screw-type terminals
for main current circuit  arrangement of electrical connectors for main current	screw-type terminals  Top and bottom
for main current circuit  arrangement of electrical connectors for main current circuit	screw-type terminals Top and bottom
arrangement of electrical connectors for main current	
arrangement of electrical connectors for main current circuit	
arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts	Top and bottom
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²)
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²)
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²)
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No  Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No  Yes  10 a
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No  Yes  10 a
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No  Yes  10 a  Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures  • with low demand rate according to SN 31920	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No Yes  10 a Yes
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures  • with low demand rate according to SN 31920  • with high demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No  Yes  10 a  Yes  40 % 50 %
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures  • with low demand rate according to SN 31920  • with high demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN 31920	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No Yes  10 a Yes  40 % 50 % 5 000
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures  • with low demand rate according to SN 31920  • with high demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN 31920  ISO 13849	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No Yes  10 a Yes  40 % 50 % 5 000 50 FIT
arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • for AWG cables for main contacts  tightening torque  • for main contacts with screw-type terminals  design of screwdriver shaft  size of the screwdriver tip  design of the thread of the connection screw  • for main contacts  Safety related data  product function suitable for safety function  suitability for use  • safety-related switching on  • safety-related switching OFF  service life maximum  test wear-related service life necessary  proportion of dangerous failures  • with low demand rate according to SN 31920  • with high demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN 31920  failure rate [FIT] with low demand rate according to SN 31920	Top and bottom  2x (1 35 mm²), 1x (1 50 mm²) 2x (1 25 mm²), 1x (1 35 mm²) 2x (18 2), 1x (18 1)  3 4.5 N·m  Diameter 5 to 6 mm  Pozidriv size 2  M6  Yes  No Yes  10 a Yes  40 % 50 % 5 000

IEC 61508	
safety device type according to IEC 61508-2	Type A
T1 value	
<ul> <li>for proof test interval or service life according to IEC 61508</li> </ul>	10 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Handle
Approvals Certificates	

#### **General Product Approval**







Confirmation



<u>KC</u>

**General Product Ap**proval

For use in hazardous locations

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report

Special Test Certificate



### Marine / Shipping











**Miscellaneous** 

other

other

#### Railway

**Environment** 





**Special Test Certific-**

Confirmation







#### **Environment**

**Environmental Con**firmations

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2031-4RA10

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RV2031-4RA10}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2031-4RA10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2031-4RA10&lang=en

Characteristic: Tripping characteristics, I²t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2031-4RA10/char

Further characteristics (e.g. electrical endurance, switching frequency)
<a href="http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2031-4RA10&objecttype=14&gridview=view1">http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2031-4RA10&objecttype=14&gridview=view1</a>

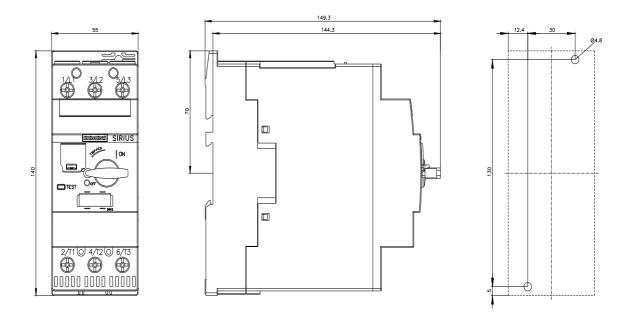

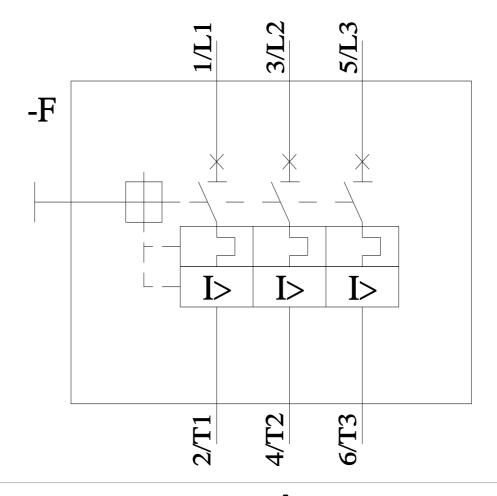

last modified: 11/6/2024 🖸

