



12V DC 60W Dimmable Electronic Transformer in J-box

Project: _____

Location: _____

Qty: _____

Notes: _____


DESCRIPTION

12V DC 60W Class 2 Mini Electronic Transformer in Junction Box
Constant Voltage Triac / ELV / MLV Dimmable

FEATURES & BENEFITS

- Compact - fits in limited spaces
- Wiring Compartments for line and low voltage
- UL Listed, Class 2, Class P, Type HL
- Short Circuit & Over Load Protection
- Hiccup mode, recovers automatically after fault condition is removed

DIMENSIONS 5" x 3 1/4" x 1 5/8"

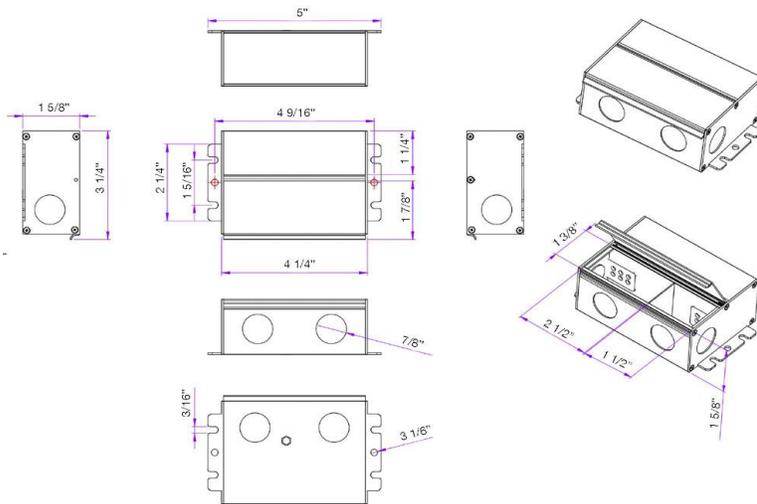


SPECIFICATION	
Applications	LED Tape, 12 V DC Ceiling Fixtures
Power	60 W
Input V / Hz	120 V AC / 47-63 Hz
Output V / A	12 V DC \pm 1 V / 5 A
Type	Constant Voltage Electronic Transformer
Dimmability	Triac / ELV / MLV
Min / Max Load	20% to 80%
THD @ 120V	without dimmer: resistive load 3%, LED load 33%
with 80% load	with dimmer: resistive load 27%, LED load 47%
Efficiency	88%
Power Factor	0.94
PWM Frequency	120 Hz
Protection	Short circuit & Overload auto recovery
Approved Location	Dry and Damp Locations
Ambient Conditions	-40°F (-40°C) to +140°F (+60°C), 20-95% RH
Warranty	3 Year
Certification	c UL us Listed, Class 2, Type HL, FCC Title 47 Class B

ORDERING GUIDE **ETF12060TDJ**

WIRING DIAGRAM



Load vs Ambient Temp Curve

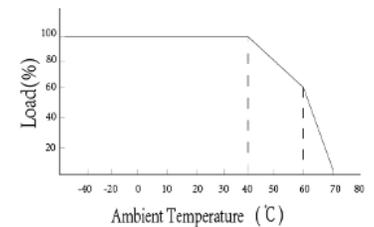

WARNING:

Do not exceed ambient temperature range from -40°F (-40°C) to +140°F (+60°C). Please mount in a shaded area or when mounted indoors install in a well-ventilated area. Load to maximum 80%. Failure to follow these instructions could lead to overheating, short life and void the warranty.