



TRAC-MASTER®

Low Voltage

MR16 UNIVERSAL

T401

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

The Universal halogen spotlight can be used for an "exposed lamp" aesthetic. **Must be used with MR16 lamps with integral lens (cover glass) except when combined with 2" accessories.**

Socket Ceramic bi-pin.

Transformer Must be ordered separately • Compatible with T537 or T538 12V electronic transformer for halogen lamps (D1.2.1) • Compatible with T537 LED universal 12V electronic transformer for LED or halogen lamps (D1.2.5) • Compatible with T539 12V electronic transformer for halogen lamps (D1.2.0) • Compatible with T543 12V magnetic transformer for LED or halogen lamps (D1.2.0).

Lens Not provided • For use only with MR16 lamps with integral lens (cover glass) except when combined with 2" accessories.

Aiming 90° vertical aiming capability and 358° rotation.

Labels UL listed, CSA certified.

Specifications subject to change without notice.





Low Voltage MR16 – Universal

Catalog Number	Description	Finish	Lamp
T401 WH	Universal	White	50W MR16 max. with integral lens (cover glass)
T401 BL	Universal	Black	50W MR16 max. with integral lens (cover glass)
T401 SL	Universal	Silver	50W MR16 max. with integral lens (cover glass)

ACCESSORIES

Cat. No.	Description	Cat. No.	Description
CGF 200	Color Glass Filter	DIFF 200	Diffusion Glass Lens
DCCF 200	Dichroic Color Correction Filter	UVF 200	UV Filter
DGF 200	Dichroic Glass Filter	LSPREAD 200	Linear Spread Glass Lens
SOLITE 200	Uniformity Lens (Solite)	T7400BL	Accessory Holder - Black
PRISM 200	Prismatic Spread Glass Lens	T7400SA	Accessory Holder - Satin Aluminum
HCLBL 200	Hexagonal Cell Louver - Black	T7470BL	2" Diameter Barn Doors - Black

See specification sheet [D1.2.2](#) for details.




TRAC-MASTER®

Low Voltage

MR16 UNIVERSAL

T401

CBCP • Centerbeam candlepower
FC • Footcandles at beam center (aim point)

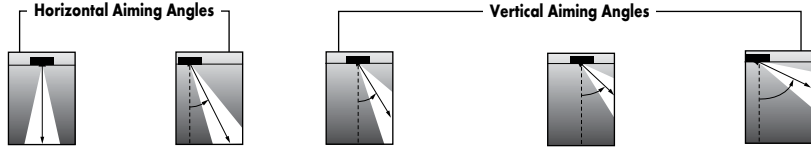

Lamp	Beam Type	Beam Spread°	Rated Life	CBCP	0°		30°			30°				45°				60°							
					MH	FC	L	W	FC	L	W	D	FC	X	L	W	FC	X	L	W	D	FC	X	L	W
Q35W MR16	SP	20°	5000	3900	4	244	1.4	1.4	158	1.9	1.6	2	122	3.5	3.1	1.4	845	2.0	1.5	1.0	4	158	2.3	1.9	1.6
					6	108	2.1	2.1	70	2.8	2.4	3	54	5.2	4.7	2.1	153	3.0	2.2	1.5	6	70	3.5	2.8	2.4
					8	61	2.8	2.8	40	3.8	3.3	4	31	6.9	6.2	2.8	86	4.0	2.9	2.0	8	40	4.6	3.8	3.3
					10	39	3.5	3.5	25	4.7	4.1	5	20	8.7	7.8	3.5	55	5.0	3.6	2.5	10	25	5.8	4.7	4.1
					12	27	4.2	4.2	18	5.7	4.9	6	14	10.4	9.3	4.2	38	6.0	4.4	3.0	12	18	6.9	5.7	4.9
					12	7	8.7	8.7	5	12.2	10.1	6	3	10.4	**	8.7	10	6.0	10.1	6.2	12	5	6.9	12.2	10.1
	FL	40°	5000	1000	4	63	2.9	2.9	41	4.1	3.4	2	31	3.5	9.6	2.9	88	2.0	3.4	2.1	4	41	2.3	4.1	3.4
					6	28	4.4	4.4	18	6.1	5.0	3	14	5.2	14.5	4.4	39	3.0	5.0	3.1	6	18	3.5	6.1	5.0
					8	16	5.8	5.8	10	8.1	6.7	4	8	6.9	19.3	5.8	22	4.0	6.7	4.1	8	10	4.6	8.1	6.7
					10	10	7.3	7.3	6	10.2	8.4	5	5	8.7	24.1	7.3	14	5.0	8.4	5.1	10	6	5.8	10.2	8.4
					12	7	8.7	8.7	5	12.2	10.1	6	3	10.4	**	8.7	10	6.0	10.1	6.2	12	5	6.9	12.2	10.1
					12	7	8.7	8.7	5	12.2	10.1	6	3	10.4	**	8.7	10	6.0	10.1	6.2	12	5	6.9	12.2	10.1
Q50W MR16	NSP	15°	6000	9100	4	638	1.0	1.0	414	1.3	1.1	2	319	3.5	2.1	1.0	902	2.0	1.0	0.7	8	104	4.6	2.6	2.3
					6	283	1.5	1.5	184	2.0	1.7	3	142	5.2	3.1	1.5	401	3.0	1.5	1.0	10	66	5.8	3.3	2.8
					8	159	2.0	2.0	104	2.6	2.3	4	80	6.9	4.1	2.0	225	4.0	2.0	1.4	12	46	6.9	3.9	3.4
					10	102	2.5	2.5	66	3.3	2.8	5	51	8.7	5.1	2.5	144	5.0	2.5	1.7	14	34	8.1	4.6	4.0
					12	71	2.9	2.9	46	3.9	3.4	6	35	10.4	6.2	2.9	100	6.0	3.0	2.1	16	26	9.2	5.3	4.5
					12	71	2.9	2.9	46	3.9	3.4	6	35	10.4	6.2	2.9	100	6.0	3.0	2.1	16	26	9.2	5.3	4.5
	NFL	25°	6000	3200	4	213	1.9	1.9	138	2.6	2.2	2	106	3.5	4.6	1.9	301	2.0	2.0	1.4	4	138	2.3	2.6	2.2
					6	94	2.9	2.9	61	3.9	3.3	3	47	5.2	7.0	2.9	134	3.0	3.1	2.0	6	61	3.5	3.9	3.3
					8	53	3.8	3.8	35	5.2	4.4	4	27	6.9	9.3	3.8	75	4.0	4.1	2.7	8	35	4.6	5.2	4.4
					10	34	4.8	4.8	22	6.5	5.5	5	17	8.7	11.6	4.8	48	5.0	5.1	3.4	10	22	5.8	6.5	5.5
					12	24	5.8	5.8	15	7.8	6.7	6	12	10.4	13.9	5.8	33	6.0	6.1	4.1	12	15	6.9	7.8	6.7
					12	24	5.8	5.8	15	7.8	6.7	6	12	10.4	13.9	5.8	33	6.0	6.1	4.1	12	15	6.9	7.8	6.7
FL	40°	6000	1700	4	116	2.9	2.9	75	4.1	3.4	2	58	3.5	9.6	2.9	164	2.0	3.4	2.1	4	75	2.3	4.1	3.4	
				6	51	4.4	4.4	33	6.1	5.0	3	26	5.2	14.5	4.4	73	3.0	5.0	3.1	6	33	3.5	6.1	5.0	
				8	29	5.8	5.8	19	8.1	6.7	4	14	6.9	19.3	5.8	41	4.0	6.7	4.1	8	19	4.6	8.1	6.7	
				10	19	7.3	7.3	12	10.2	8.4	5	9	8.7	24.1	7.3	26	5.0	8.4	5.1	10	12	5.8	10.2	8.4	
				12	13	8.7	8.7	8	12.2	10.1	6	6	10.4	**	8.7	18	6.0	10.1	6.2	12	8	6.9	12.2	10.1	
				12	13	8.7	8.7	8	12.2	10.1	6	6	10.4	**	8.7	18	6.0	10.1	6.2	12	8	6.9	12.2	10.1	

The beam spread in degrees and the beam "L" and "W" in the following tables are computed at 50% of centerbeam candlepower and represent areas of "effective illumination."

**Due to steep aiming angle, length of beam extends beyond 25'.