

TIME RELAY, MULTI-FUNCTION, 2 CO CONTACTS, 27 FUNCTIONS, 7 TIME SET. RANGES, (1, 10, 100)s 10MIN; (1,10,100) HR 24V AC/DC AT AC 50/60HZ, LED, SCREW TERMINAL



Figure similar

General technical data:		
product brand name		SIRIUS
Mounting position		any
Product function at the relay outputs Switchover delayed/without delay		Yes
Product function non-volatile		No
Product component		
• Relay output		Yes
• semi-conductor output		No
Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during operation	°C	-25 ... +60
• during storage	°C	-40 ... +85
• during transport	°C	-40 ... +85
Relative humidity during operation	%	10 ... 95
EMC emitted interference acc. to IEC 61812-1		EN 61000-6-4(3)
EMI immunity acc. to IEC 61812-1		EN 61000-6-2

Conducted interference due to burst acc. to IEC 61000-4-4		2 kV network connection / 1 kV control connection
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m
Surge voltage resistance rated value	V	4 000
Power loss [W] total typical	W	2
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Equipment marking acc. to DIN EN 81346-2		K
Category acc. to EN 954-1		none
Protection against electrical shock		finger-safe
Protection class IP		IP20
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000
Vibration resistance acc. to IEC 60068-2-6		10 ... 55 Hz / 0.35 mm
Shock resistance acc. to IEC 60068-2-27		11g / 15 ms
Relative repeat accuracy	%	1
Recovery time	ms	150
Minimum ON period	ms	35
Degree of pollution		3
Insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	V	300
Relative setting accuracy relating to full-scale value	%	5

Switching Function:

Switching function

• ON-delay	Yes
• ON-delay/instantaneous contact	Yes
• passing make contact	Yes
• passing make contact/instantaneous contact	Yes
• OFF delay	Yes
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
• flashing symmetrically starting with pulse	Yes
• flashing symmetrically starting with pulse/instantaneous	Yes
• flashing symmetrically starting with interval	Yes

<ul style="list-style-type: none"> flashing symmetrically starting with interval/instantaneous 		Yes
<ul style="list-style-type: none"> star-delta circuit 		Yes
<ul style="list-style-type: none"> star-delta circuit with delay time 		No
Switching function with control signal		
<ul style="list-style-type: none"> additive ON delay 		Yes
<ul style="list-style-type: none"> passing break contact 		Yes
<ul style="list-style-type: none"> OFF delay 		Yes
<ul style="list-style-type: none"> pulse-shaping 		Yes
<ul style="list-style-type: none"> OFF delay/instantaneous 		Yes
<ul style="list-style-type: none"> ON-delay/OFF-delay/instantaneous 		Yes
<ul style="list-style-type: none"> passing break contact/instantaneous 		Yes
<ul style="list-style-type: none"> additive ON delay/instantaneous 		Yes
<ul style="list-style-type: none"> ON-delay/OFF-delay 		Yes
<ul style="list-style-type: none"> passing make contact 		Yes
<ul style="list-style-type: none"> passing make contact/instantaneous contact 		Yes
<ul style="list-style-type: none"> pulse delayed 		Yes
<ul style="list-style-type: none"> pulse delayed/instantaneous 		Yes
<ul style="list-style-type: none"> pulse-shaping/instantaneous 		Yes
Switching function of interval relay with control signal		
<ul style="list-style-type: none"> retrotriggerable with deactivated control signal/instantaneous contact 		Yes
<ul style="list-style-type: none"> retrotriggerable with activated control signal 		Yes
<ul style="list-style-type: none"> retrotriggerable with activated control signal/instantaneous contact 		Yes
<ul style="list-style-type: none"> retriggerable with deactivated control signal 		Yes
Design of the control terminal non-floating		Yes

Control circuit/ Control:

Adjustable time	s	0.05 ... 360 000
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1	Hz	50 ... 60
Operating range factor control supply voltage rated value		
<ul style="list-style-type: none"> at AC <ul style="list-style-type: none"> — at 50 Hz — at 60 Hz at DC 		0.85 ... 1.1 0.85 ... 1.1 0.85 ... 1.1

Auxiliary circuit:

Contact reliability of auxiliary contacts		one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
Material of switching contacts		AgSnO2
Operating current of auxiliary contacts		

<ul style="list-style-type: none"> • at AC-15 <ul style="list-style-type: none"> — at 24 V — at 250 V • at DC-13 <ul style="list-style-type: none"> — at 24 V — at 125 V — at 250 V 	A	3
	A	3
	A	1
	A	0.2
	A	0.1
Design of the fuse link for short-circuit protection of the auxiliary switch required		fuse gL/gG: 4 A
Thermal current	A	5
Switching capacity current with inductive load	A	0.01 ... 3
Number of NC contacts		
<ul style="list-style-type: none"> • delayed switching • instantaneous contact 		0
		0
Number of NO contacts		
<ul style="list-style-type: none"> • delayed switching • instantaneous contact 		0
		0
Number of CO contacts		
<ul style="list-style-type: none"> • delayed switching • instantaneous contact 		2
		0

Installation/ mounting/ dimensions:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	22.5
Height	mm	100
Depth	mm	90
Required spacing with side-by-side mounting		
<ul style="list-style-type: none"> • upwards • forwards • at the side • Backwards • downwards 	mm	0
	mm	0
	mm	0
	mm	0
	mm	0
Required spacing for grounded parts		
<ul style="list-style-type: none"> • Backwards • at the side • upwards • forwards • downwards 	mm	0
	mm	0
	mm	0
	mm	0
	mm	0
Required spacing for live parts		
<ul style="list-style-type: none"> • downwards • Backwards • at the side 	mm	0
	mm	0
	mm	0

- forwards
- upwards

mm	0
mm	0

Connections/ Terminals:

Type of electrical connection for auxiliary and control current circuit		screw-type terminals
Type of connectable conductor cross-sections		1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> • solid • finely stranded <ul style="list-style-type: none"> — with core end processing • at AWG conductors <ul style="list-style-type: none"> — stranded — solid 		1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²)
		1x (20 ... 12), 2x (20 ... 14)
		1x (20 ... 12), 2x (20 ... 14)
Tightening torque	N·m	0.6 ... 0.8

Certificates/ approvals:

General Product Approval	Declaration of Conformity	other
 CCC	 CSA	 EAC
	 UL	 EG-Konf.
		Umweltbestätigung

other

[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP25051BB30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RP25051BB30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP25051BB30&lang=en

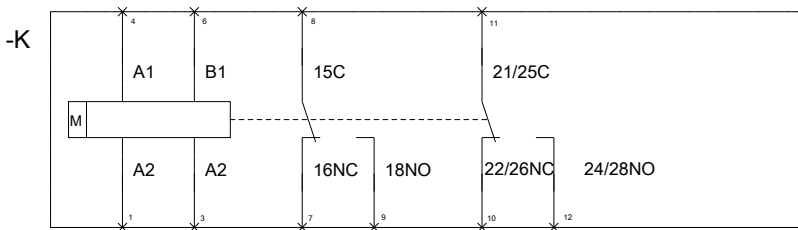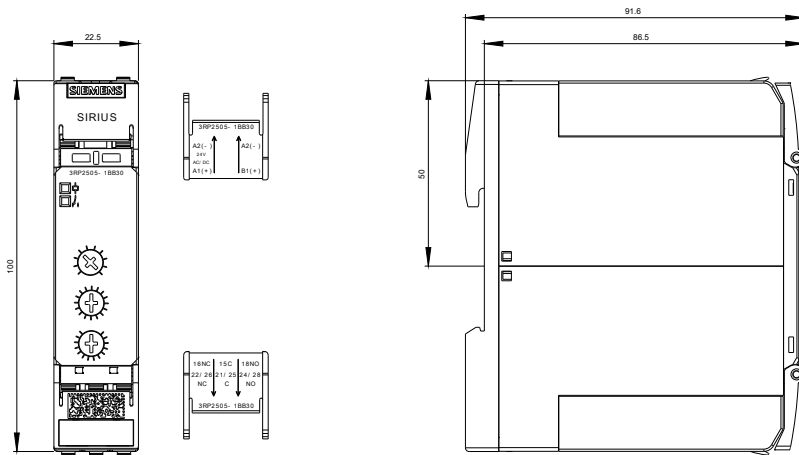

last modified:

19.03.2016