


# OT25FT3

ABB contact for Canada [Print to Pdf..](#)

## General Information

<b>Extended Product Type:</b>	OT25FT3
<b>Product ID:</b>	1SCA104884R1001
<b>EAN:</b>	6417019390277
<b>Catalog Description:</b>	OT25FT3 Switch-disconnector
<b>Long Description:</b>	Front operated switch-disconnector. Types OT 16...125 include protected terminal clamps, IP 20.

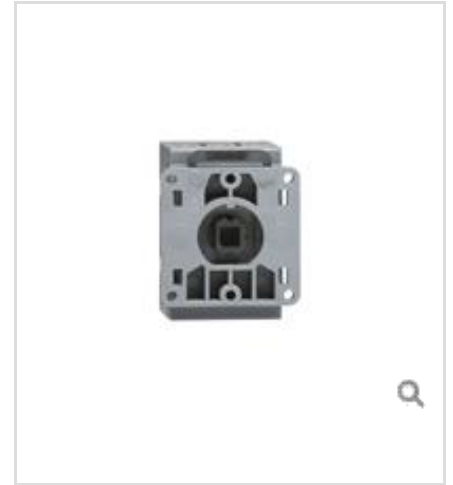

## Categories

Products » Low Voltage Products and Systems » Switches » Switch  
Disconnectors

## Ordering

<b>EAN:</b>	6417019390277
<b>Minimum Order Quantity:</b>	1 piece
<b>Customs Tariff Number:</b>	85365080

## Dimensions

<b>Product Net Width:</b>	43 mm
<b>Product Net Height:</b>	54 mm
<b>Product Net Depth:</b>	52 mm
<b>Product Net Weight:</b>	0.13 kg

## Container Information

<b>Package Level 1 Units:</b>	1 piece
<b>Package Level 1 Width:</b>	63 mm
<b>Package Level 1 Height:</b>	54 mm
<b>Package Level 1 Length:</b>	65 mm
<b>Package Level 1 Gross Weight:</b>	0.13 kg
<b>Package Level 1 EAN:</b>	6417019390277

## Environmental

<b>RoHS Status:</b>	Planned to follow EU Directive 2002/95/EC August 18, 2005 and amendment after 2009 Q3
---------------------	---

## Technical UL/CSA

<b>Ampere Rating UL/CSA:</b>	25 A
<b>Horse Power Rating UL/CSA:</b>	acc. to UL 200V 7.5 Hp acc. to UL 208V 7.5 Hp acc. to UL 240V 7.5 Hp acc. to UL 480V 15 Hp acc. to UL 600V 20 Hp

## Additional Information

<b>Cable Cross-Section:</b>	0.75... 10 mm <sup>2</sup>
<b>Conventional Free-air Thermal Current (I<sub>th</sub>):</b>	q=40°C 32 A
<b>Conventional Thermal Current (I<sub>the</sub>):</b>	Fully Enclosed 32 A
<b>Earthing Switch Type:</b>	No Additional Type
<b>Handle Type:</b>	None
<b>IIT Publishing Status:</b>	Level 0 - Information enabled
<b>Includes:</b>	None
<b>Mounting Type:</b>	Door Mounting
<b>Number of Poles:</b>	3
<b>Operating Mechanism:</b>	Mechanism on top of the switch
<b>Operating Mode:</b>	Front Operated
<b>Pollution Degree:</b>	3
<b>Position of Line Terminals:</b>	Top in - bottom out
<b>Power Loss:</b>	Per Pole 0.6 W
<b>Product Main Type:</b>	OT
<b>Product Name:</b>	Switch-disconnectors
<b>Rated Impulse Withstand Voltage (U<sub>imp</sub>):</b>	8 kV
<b>Rated Insulation Voltage (U<sub>i</sub>):</b>	750 V
<b>Rated Operational Current AC-21A (I<sub>e</sub>):</b>	(380 ... 415V) 25 A (500V) 25 A (690V) 25 A
<b>Rated Operational Current AC-22A (I<sub>e</sub>):</b>	(380 ... 415 V) 25 A (500 V) 25 A (690 V) 25 A
<b>Rated Operational Current AC-23A (I<sub>e</sub>):</b>	(690 V) 11 A (500 V) 20 A (380 ... 415 V) 20 A
<b>Rated Operational Power AC-23A (P<sub>e</sub>):</b>	(220 ... 240V) 4 kW (400V) 9 kW (415V) 9 kW (500V) 9 kW (690V) 9 kW
<b>Rated Operational Voltage:</b>	750 V
<b>Rated Short-time Withstand Current (I<sub>cw</sub>):</b>	for 1.0s 0.5 kiloampere rms
<b>Special Functions:</b>	No
<b>Standards:</b>	IEC
<b>Terminal Type:</b>	Screw Terminals

---

### Certificates and Declarations (Document Number)

<b>Declaration of Conformity - CE:</b>	1SCC301166D0201
<b>RoHS Information:</b>	1SCC301183D0201

---

### Classifications

<b>E-nummer:</b>	3170945
<b>ETIM 5.0:</b>	EC000216 - Switch disconnecter
<b>Object Classification Code:</b>	Q

---