



SWITCH-DISCONNECTOR 250A, FRAME SIZE 2, 3-POLE FRONT OPERATING LEFT BASIC UNIT WITHOUT HANDLE FLAT TERMINAL INCL. PHASE BARRIERS

Model	
product brand name	SENTRON
product designation	3KD switch disconnecter
design of the product	Switch
display version for switch position indicator door-coupling rotary operating mechanism	ON-OFF
design of the actuating element	Without handle
type of the driving mechanism	Front operating mechanism
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
type of device	fixed mounting
size of switch disconnecter	2
mechanical service life (operating cycles) typical	15 000
electrical endurance (operating cycles)	
• at AC-23 A at 690 V	1 500
• at DC-23 A at 440 V	1 000
I <sup>2</sup> t value	
• with closed switch at 1000 V for combination switch +gG/aM SITOR fuse maximum	19 815 A <sup>2</sup> ·s
• of the fuse at 500 V maximum permissible	780 000 A <sup>2</sup> ·s
• of the gG fuse at 690 V maximum permissible	525 000 A <sup>2</sup> ·s
• of the aM fuse at 690 V maximum permissible	565 000 A <sup>2</sup> ·s
• of the gG/aM SITOR fuse at 1000 V maximum permissible	48 000 A <sup>2</sup> ·s
• of the molded case circuit breaker at 415 V maximum permissible	1 750 000 A <sup>2</sup> ·s
position of the switch operating mechanism	at the left end
overvoltage in percent relative to the operating voltage at AC at 400, 500, 690 V at 50/60 Hz	10 %
overvoltage category	III
degree of pollution	3
Voltage	
operating voltage with current paths in series	
• with degree of pollution 2 at DC rated value	440 V / 3
• with degree of pollution 3 at DC rated value	440 V / 3
insulation voltage	
• rated value	1 000 V
surge voltage resistance rated value	8 kV
Protection class	
protection class IP	IP00
protection class IP	

<ul style="list-style-type: none"> <li>with closed switch with cover or cable lug cover</li> <li>on the front</li> </ul>	IP20 IP00
<b>Dissipation</b>	
power loss [W]	
<ul style="list-style-type: none"> <li>with conventional rated thermal current per pole</li> <li>with conventional rated thermal current per device</li> <li>for rated value of the current at AC in hot operating state per pole</li> </ul>	8.2 W 24.6 W 8.2 W
<b>Main circuit</b>	
operating power	
<ul style="list-style-type: none"> <li>at AC-23 A at 500 V rated value</li> </ul>	110 kW
operational current rated value	250 A
<b>Auxiliary circuit</b>	
number of connected NC contacts for auxiliary contacts	0
number of connected NO contacts for auxiliary contacts	0
number of connected CO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	4
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
<b>Suitability</b>	
suitability for use	
<ul style="list-style-type: none"> <li>main switch</li> <li>switch disconnecter</li> <li>EMERGENCY OFF switch</li> <li>safety switch</li> <li>maintenance/repair switch</li> </ul>	Yes Yes Yes Yes Yes
<b>Product details</b>	
product component	
<ul style="list-style-type: none"> <li>trip indicator</li> <li>voltage trigger</li> <li>undervoltage release</li> <li>undervoltage release with leading contact</li> </ul>	No No No No
product extension auxiliary switch	Yes
product extension optional	
<ul style="list-style-type: none"> <li>motor drive</li> <li>voltage trigger</li> </ul>	No No
<b>Short circuit</b>	
short-time withstand current (I <sub>cw</sub> ) at 1000 V AC/440 V DC limited to 1 s rated value	4 kA
short-circuit current making capacity (I <sub>cm</sub> ) for switch disconnecter	
<ul style="list-style-type: none"> <li>at 400 V AC without fuse link rated value minimum</li> <li>at 1000 V AC without fuse link rated value minimum</li> <li>at DC 440 V without fuse link rated value minimum</li> </ul>	30 kA 12 kA 12 kA
conditional short-circuit current with line-side fuse protection	
<ul style="list-style-type: none"> <li>at 415 V by molded case circuit breaker rated value</li> <li>at 500 V by gG fuse rated value</li> <li>at 690 V by gG fuse rated value</li> </ul>	65 kA 100 kA 100 kA
<b>Connections</b>	
type of connectable conductor cross-sections for aluminum conductor	
<ul style="list-style-type: none"> <li>stranded with lug</li> </ul>	1x (10 ... 70 mm <sup>2</sup> )
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> <li>with combination of Al conductor+switch</li> <li>for copper busbar</li> </ul>	130A / 70 mm <sup>2</sup> 1x (20x4 mm <sup>2</sup> )
type of electrical connection for main current circuit	flat connector
<b>Mechanical Design</b>	
height	168 mm
width	121 mm
depth	68 mm
fastening method	Screw fixing and standard rail mounting 35 mm

fastening method	No
<ul style="list-style-type: none"> <li>• 4-hole front mounting</li> <li>• front mounting with central attachment</li> <li>• rail mounting</li> </ul>	No
mounting position	any
net weight	1 052 g

### Environmental conditions

ambient temperature during operation	-25 °C
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	70 °C
ambient temperature during storage	-50 °C
<ul style="list-style-type: none"> <li>• minimum</li> <li>• maximum</li> </ul>	80 °C

### Certificates

reference code according to IEC 81346-2	Q
---	---

General Product Approval	Declaration of Conformity
--------------------------	---------------------------

[Confirmation](#)



[Miscellaneous](#)



Declaration of Conformity	Test Certificates	Marine / Shipping	other	Environment
---------------------------	-------------------	-------------------	-------	-------------



[Type Test Certificates/Test Report](#)



[Confirmation](#)

[Miscellaneous](#)

[Environmental Confirmations](#)

### Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KD3830-0NE10-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3KD3830-0NE10-0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3KD3830-0NE10-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD3830-0NE10-0)

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications


<http://www.siemens.com/specifications>

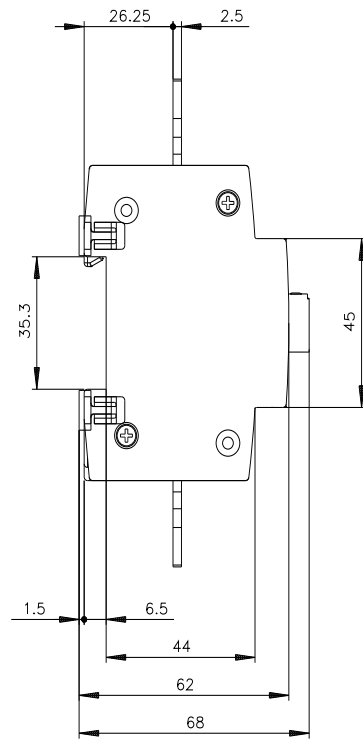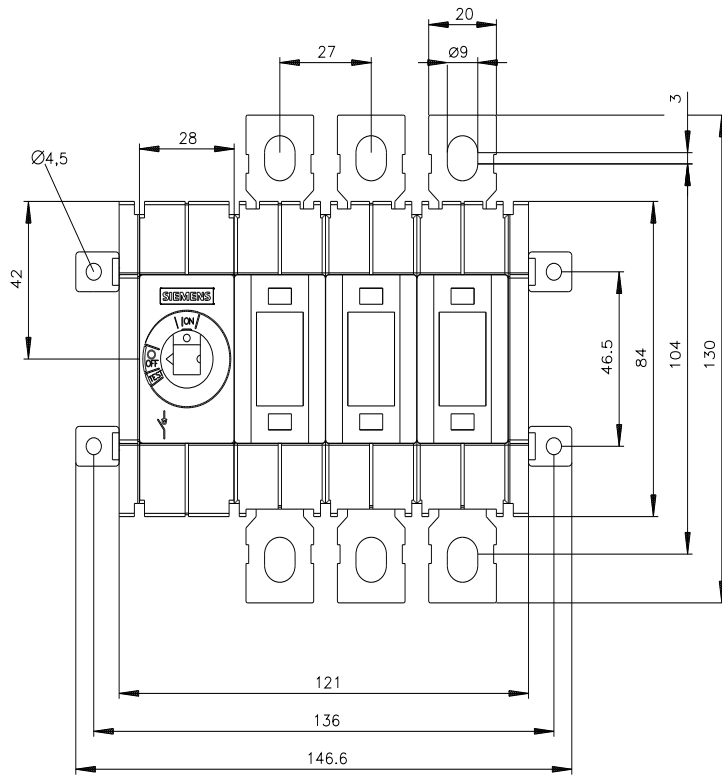

**-Q**

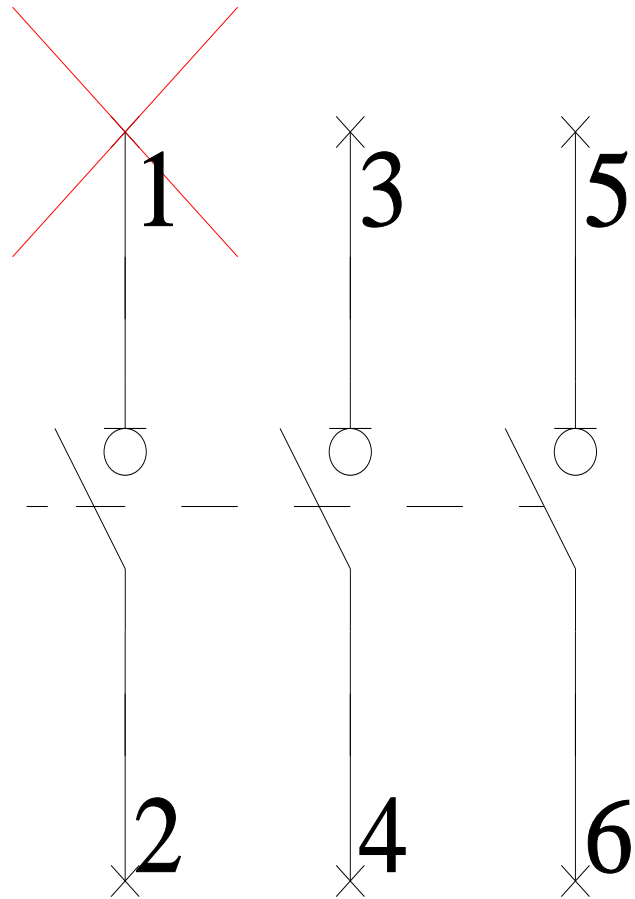

# -CR

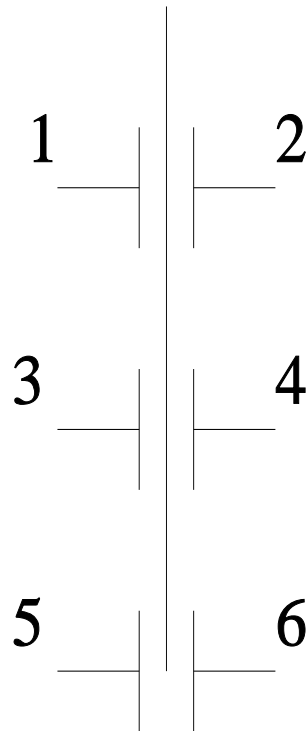

---

last modified:

8/1/2022 

