

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

## Individual Spec Sheet

# WDP-L

## DECORATIVE WALL PACK

3 CCT Selectable and integrated photocell

### ORDERING INFORMATION

**Order code:** 69726  
**Model number:** WDP-LS1-W-3C-BR  
**UPC:** 069549029477  
**Case quantity:** 10  
**DLC unique ID:** S-GYTORM

### PHYSICAL DATA

**Finish:** Bronze  
**Housing material:** Die-cast aluminum  
**Lens material:** Prismatic polycarbonate

### PERFORMANCE DATA

**Watts (W):** 15  
**Volts (V AC):** 120-277  
**Color temperature (K)<sup>1</sup>:** 3 000/4 000/5 000  
**Lumen output (lm)<sup>2</sup>:** 1,884  
**Efficacy (lm/W):** 132  
**CRI:** 80+  
**Life L70 (h)<sup>3</sup>:** 163,000  
**THD (%):** 7.4  
**IP rating:** IP65  
**IK rating:** IK08  
**Power factor:** 0.931  
**Surge protection (kV):** 2.5  
**Traditional equivalent (HPS):** 50  
**Dimming:** Yes  
**B.U.G. rating:** B0 U2 G1  
**Distribution type:** III  
**Photocell:** Yes  
**Operating temp. range:** -40 °C to 45 °C (-40 °F to 113 °F)

<sup>1</sup> Typical color temperature range: +/- 5 %.

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### COMPATIBLE DIMMERS<sup>1</sup>

Brand	Model
Lutron	NTSTV-DV, NFTV, DVTV-WH
Leviton	DS710, IP710
Legrand	H4FBL3PW


Dimming range: 0%-100%

<sup>1</sup> This table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Some dimmers may require more than one product for stable operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation.

This lighting equipment meets requirements of ICES-005 issue 5 class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.



**DIMENSIONS AND WEIGHTS**

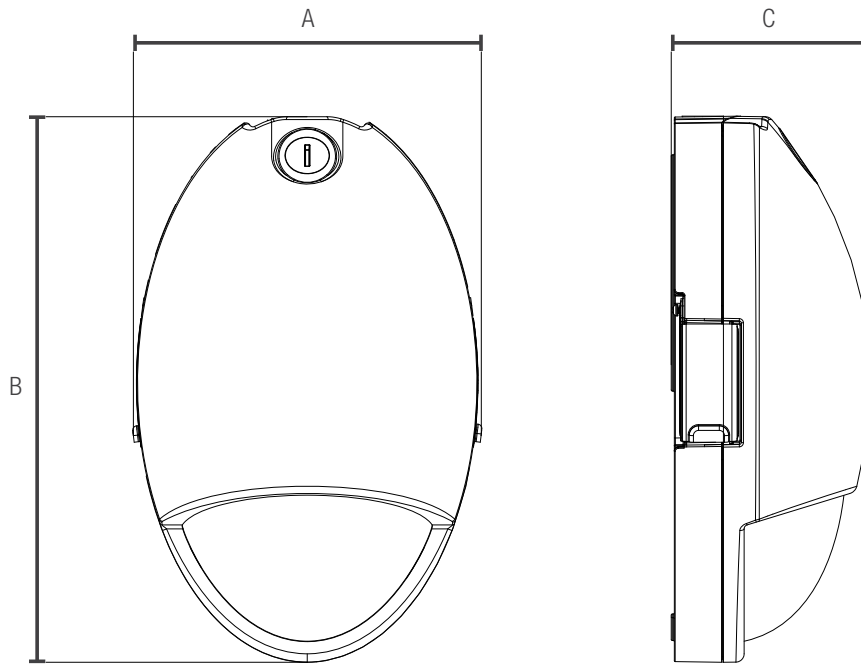


A in. (cm)	6 5/8" (16.8)
B in. (cm)	10 3/8" (26.3)
C in. (cm)	3 3/4" (9.61)
Net weight (lbs)	3.21

**PHOTOMETRIC DATA<sup>1</sup>**

69726 • WDP-LS1-W-3C-XX • 4 000 K • 1 884 lm

**Polar candela distribution**

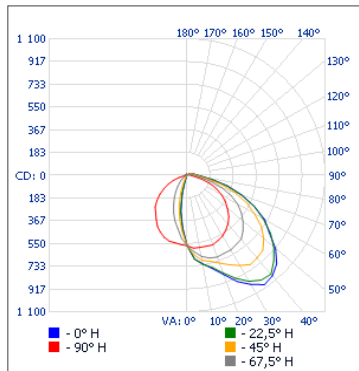

**Zonal lumen summary**

Zone	Lumens	% Fixture
0-30	418.5	22.2
0-40	712.8	37.8
0-60	1 315.4	71.7
60-90	434.5	23.1
70-100	225.2	12
90-120	71.0	3.8
0-90	1 785.9	94.8
90-180	98.1	5.2
0-180	1 884.1	100

**Illuminance at a distance**

Center beam fc	Beam width
17.0'	1.96 fc
34.0'	0.49 fc
51.0'	0.22 fc
68.0'	0.12 fc
85.0'	0.08 fc
102.0'	0.05 fc

Beam width	Vert. spread:	Horiz. spread:
23.0'	68.1°	92.7°
35.6'		
45.9'		
71.2'		
106.8'		
142.5'		
178.1'		
213.7'		

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.