


LEAFLET

Midwest Electrical Products



50A Power Outlet with EV rated receptacle

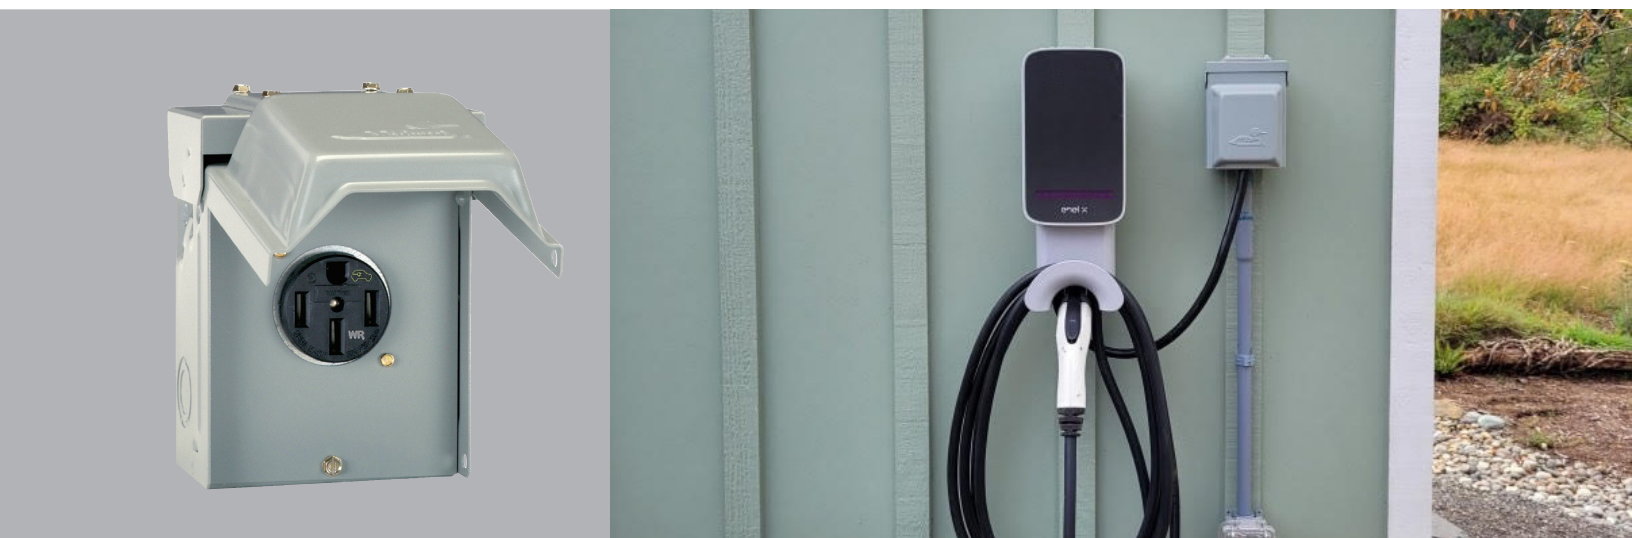

Application Information

Portable EV chargers requiring electricity continues to increase. This creates the need for conveniently located receptacles to provide power for cord connected equipment. The new Midwest Electric U054EV Power Outlet provides a specific solution for 50A EV chargers requiring continuous operation.

Features and Benefits

- NEMA 3R weatherproof construction
- 50A EV rated receptacle
- G90 galvanized steel construction for superior corrosion resistance
- Durable polyester powder coat finish resists chipping and fading
- All in one construction for factory assured terminations
- Rolled edge door for cord protection
- Cover design allows cords to exist while maintaining the NEMA 3R integrity
- Padlockable door to help prevent unauthorized access
- Dead front construction prevents accidental contact with live parts
- All components factory wired and assembled

Technical data

Receptacle:	 NEMA 14-50WR
Type:	1-phase / 3-wire
Grounding:	Yes
Amperage:	50 A
Voltage:	125 / 250 VAC
Temperatur Rating:	-40°C to 60°C
Wire Gauges:	#4, #6, #8, #10 for ground only
Grade:	Industrial
Torque:	75 in-lbs
Enclosure Type:	NEMA 3R
Certification:	cULus

Ordering information

Ordering information	Part number
4-pack	U054EV
Single Pack (retail only)	U054EVP
Pallet with single pack (240 units)	U054EVPLT1
Replacement receptacle	PR54UEVWR

Dimensions

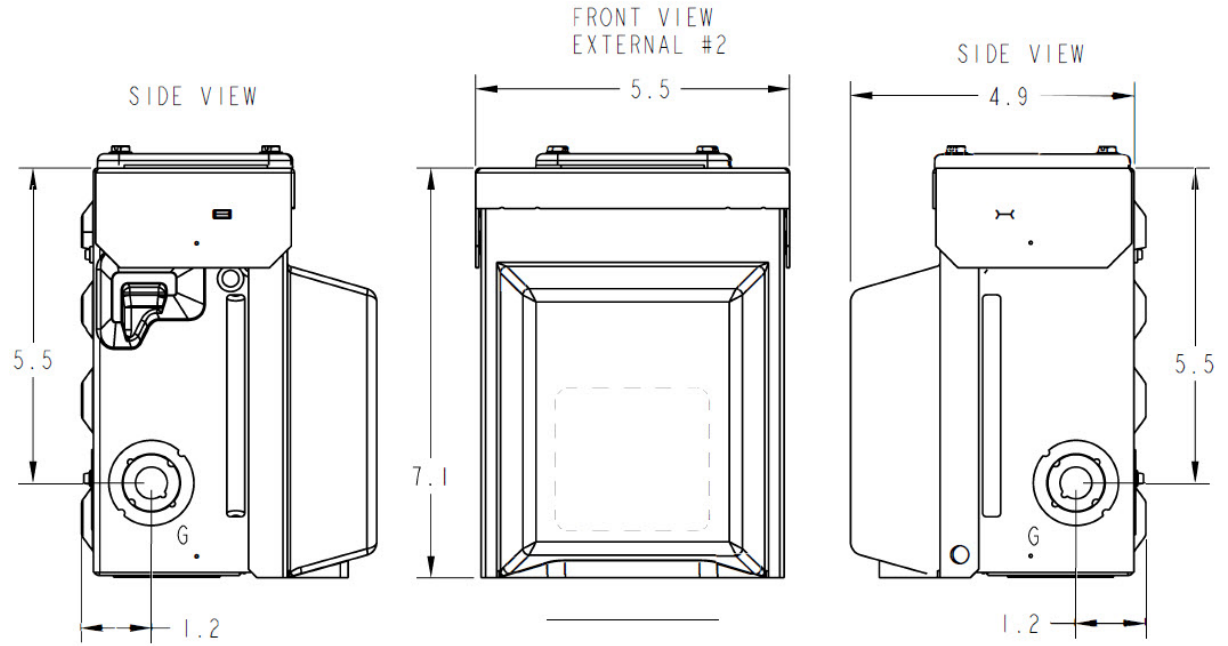


ABB Inc.
800 Blvd Hymus
St-Laurent, Qc Canada
H4S 0B5

new.abb.com/ca/midwest

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Inc does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2025 ABB
All rights reserved